

## OSRAM S3030 Quantum Dot Linear Modules

Power of OSRAM in standard and custom LED modules

## Data Sheet

Version 1.0

### Lean & Fast. Made Smarter.

**High CRI efficacy** - 178 lumens per watt at 90 CRI with the ability to achieve DLC certification

**Flexible design** - 22" length that can be seamlessly connected end-to-end

**Color accurate** - great color quality with  $R_f > 90$ ,  $R_g > 100$  and excellent color over angle uniformity

**Easy to integrate** - designed to Zhaga dimensions and screw hole specifications

**Quick production** - push terminals for quick and simple wiring

### Primary Applications



Indoor lighting

-Office


-Education

-Retail



-Hospitality

-Transportation

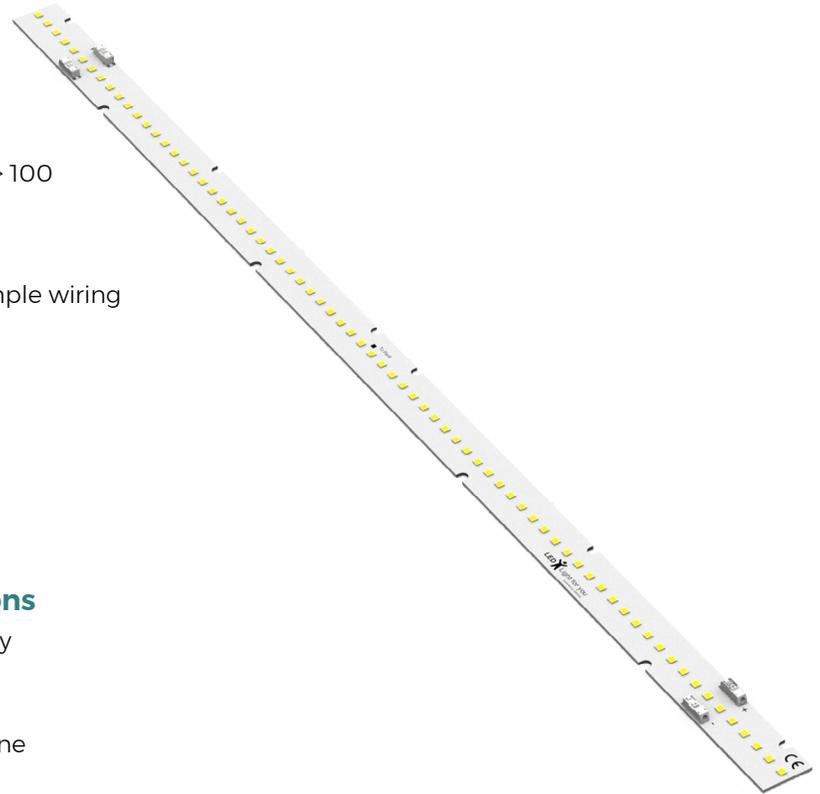

### Superior Performance With Flexible Options

- Industry leading 90 CRI combined with high efficacy
- Private label or custom designs
- Adhesive tape can be added for rapid installation
- Pair with a standard driver for a complete light engine

### Simplify Your Next Lighting Design

Introducing NewEnergy OSRAM linear LED modules for indoor office, education and retail area lighting fixtures. The modules come in a 22" configuration that is ideal for panel or linear lights. They are also flexible enough to support a range of specialty indoor applications. Designed to Zhaga standards, NewEnergy' modules are easy to integrate into existing designs and can be quickly upgraded as LED performance improves.

### Custom Solutions

NewEnergy operates facilities globally with ISO certifications for the LED lighting, automotive and medical industries. Our North Carolina based office provides quick engineering & sales support with an R&D lab for prototype development and custom solutions. Our in-house global manufacturing capabilities allow for both building in the United States as well as overseas at scale.

### About NewEnergy

NewEnergy accelerates the adoption of LED technology through simple, modular products and custom designs. Through 30 years of experience, state of the art manufacturing, full traceability and advanced quality controls, NewEnergy offers leading solid state lighting components, modules and custom solutions. NewEnergy customers get to market faster, with less resources, at lower costs. Visit [New-EnergyLLC.com](http://New-EnergyLLC.com) for more information.

# Linear LED Modules from NewEnergy

## Order Code Formatting

Series	LED Count	LED Code	Color Temperature	Color Rendering Index	Internal Code
SSB1 - Standard Linear LED PCB Assembly	72 - 72 LEDs	F16 - Osconiq S3030 LED	27 - 2700K	90 - 90 CRI	XX
			30 - 3000K		
			35 - 3500K		
			40 - 4000K		

## Electrical Characteristics

Part Number	Forward Voltage (v)		Typical LED Thermal Resistance Junction to Solder Point (K/W) RTh J-HS
	Typical	Maximum	
SSB1-72F16-x	33.0	35.4	8.4

Intended for connection to a class 2 power source with a maximum operating voltage of 50 Vdc

## Maximum Ratings

Part Number	DC Current (A)	Tsp Temp (°C)	Power (W)
SSB1-72F16-x	1.08	105	38.2


## Board Material Properties

Property	Value	Unit
Thickness	.059	in
Construction	FR4	-
Temperature	130	°C
Flame Rating	V-0	-
Copper Thickness	1	oz




# Linear LED Modules from NewEnergy

## Standard White Chromaticity Regions

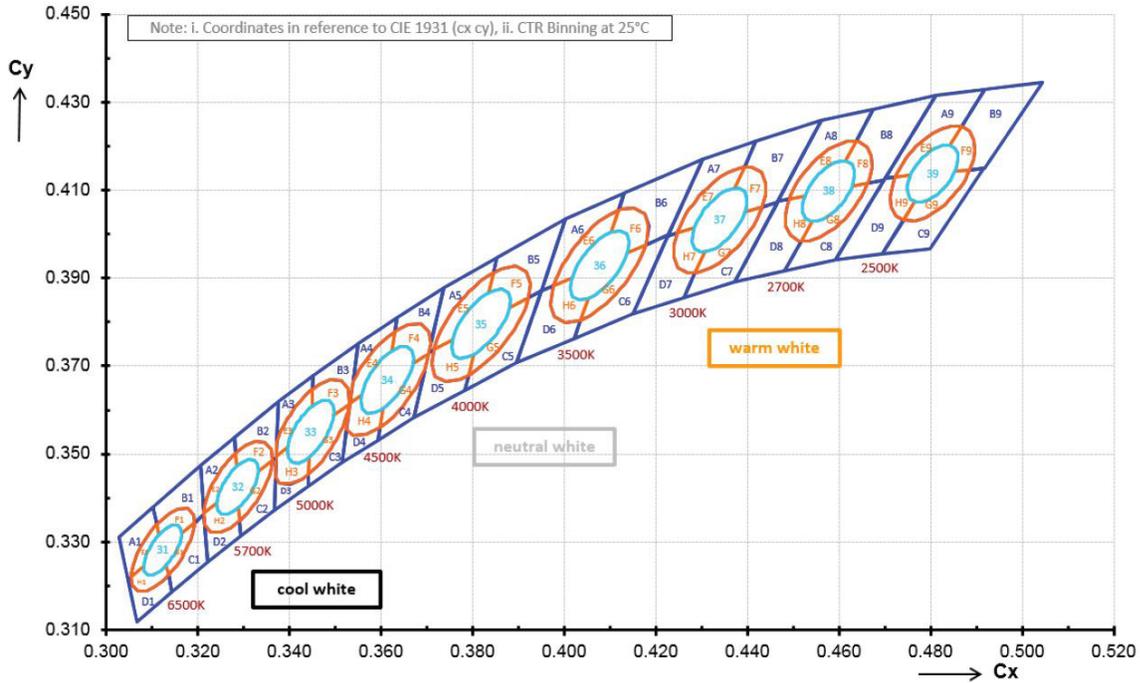

## Relative Spectral Emission


$\phi_{rel} = f(\lambda); T_s = 25^\circ\text{C}; I_F = 390\text{ mA}$

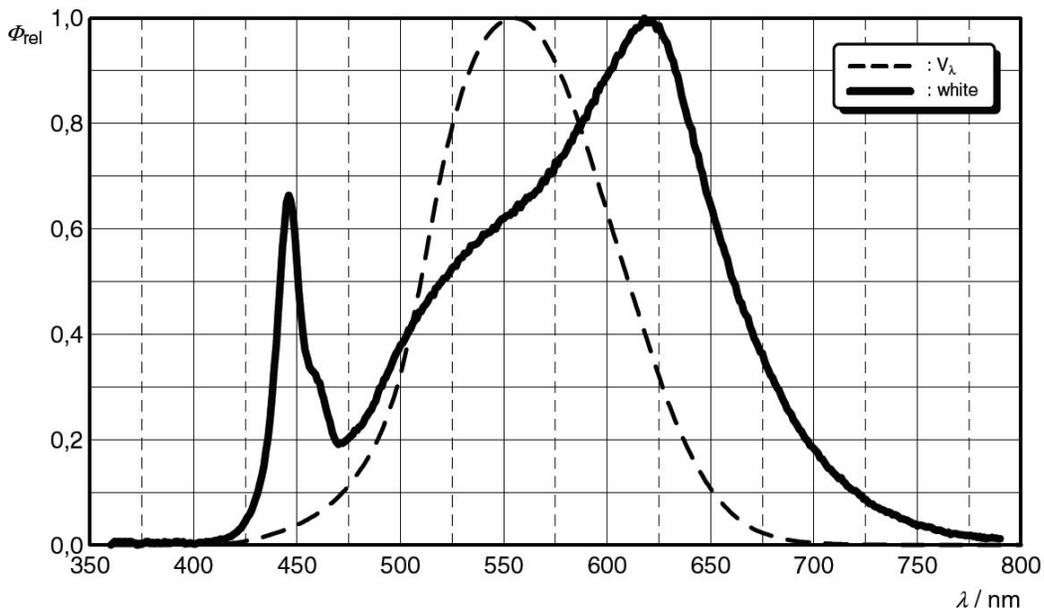

# Linear LED Modules from NewEnergy


## Radiation Characteristics

$I_{rel} = f(\Phi); T_s = 25\text{ }^\circ\text{C}$

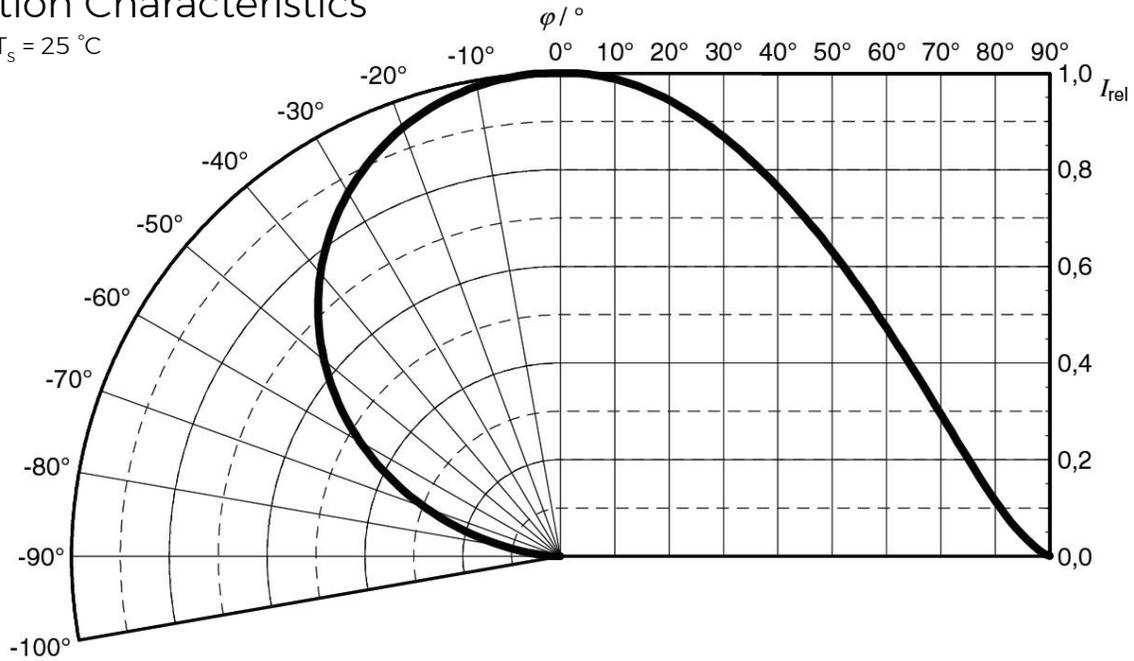

## Forward Current

$I_F = f(V_F); T_s = 25\text{ }^\circ\text{C}$

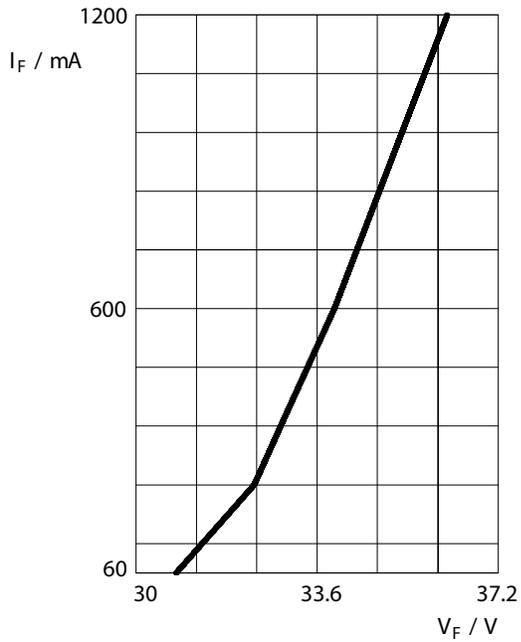

## Relative Luminous Flux

$\Phi_V / \Phi_V(390\text{ mA}) = f(I_F); T_s = 25\text{ }^\circ\text{C}$

