



### **Luminus SST-70X Starboard**

Industry Leading High Powered LED Starboards

# **Data Sheet**

Version 1.0

#### Lean & Fast, Made Smarter.

**Superior Performance** – Stay current with the highest intensity LEDs

**Design Faster** - Use industry standard starboards to shorten development time

**Maximum Flexibility** - Design to your exact specifications using NewEnergy starboards

**Rapid Innovation** – Work with NewEnergy on your custom solution


#### **Primary Applications**







Horticulture Canopy
Entertainment Garage
Stage/concert Portable
Spot lighting High bay
Architectural

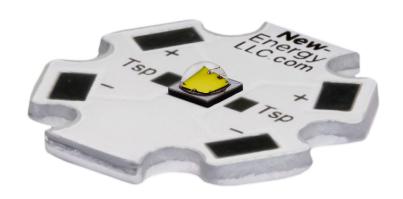

#### **Custom Solutions**

NewEnergy operates facilities globally with ISO certifications for the LED lighting, automotive and medical industries. Our North Carolina based office provides quick engineering & sales support with a R&D lab for prototype development and custom solutions. Our in-house global manufacturing capabilities allow for both building in the United States as well as overseas at scale.

#### **About NewEnergy**

NewEnergy accelerates the adoption of LED technology through simple, modular products and custom designs. Through 30 years of experience, state of the art manufacturing, full traceability and advanced quality controls, NewEnergy offers leading solid state lighting components, modules and custom solutions. NewEnergy customers get to market faster, with less resources, at lower costs. Visit new-energyllc.com for more information.

RoHS ( E

# **Luminus SST-70X Starboards**

## **Product Selection Table**

Part Number	ССТ	CRI	Luminous Flux (lm)		Efficacy Nominal	Watts (W)	
			Typical At 750mA	Typical At 2625mA	At 750mA (lm/W)	Nominal At 750mA	Nominal At 2625mA
LST1-01G11-6570-01	6500K	70	969	2499	113.3	8.55	33.82

All values shown above are typical.

Do not look into the light that is emitting from these LEDs as it is harmful to the human eye.

Eye injury may result. Use skin and eye protection as necessary.

# Maximum Ratings

Part Number	DC Current (A)	Forward Voltage At 2.6A (V)	Tsp Temp (°C)	Power (W)
LST1-01G11-x	2.625	14.17	105	37.20

### Dimensions (Units: Inches)

